



JISAN HEAVY INDUSTRY LTD.
Professional Excavator Attachment Manufacturer



Address: NO 41, Jinfeng Road, Fushan District, Yantai, China. 265500
Tel: +86 18615951533 Fax: +86-5353468305
E-mail: scottning@jisanbr.com Website: www.jisanbr.net
Facebook: www.facebook.com/jisanheavyindustry



STRUCTURAL SCHEMA

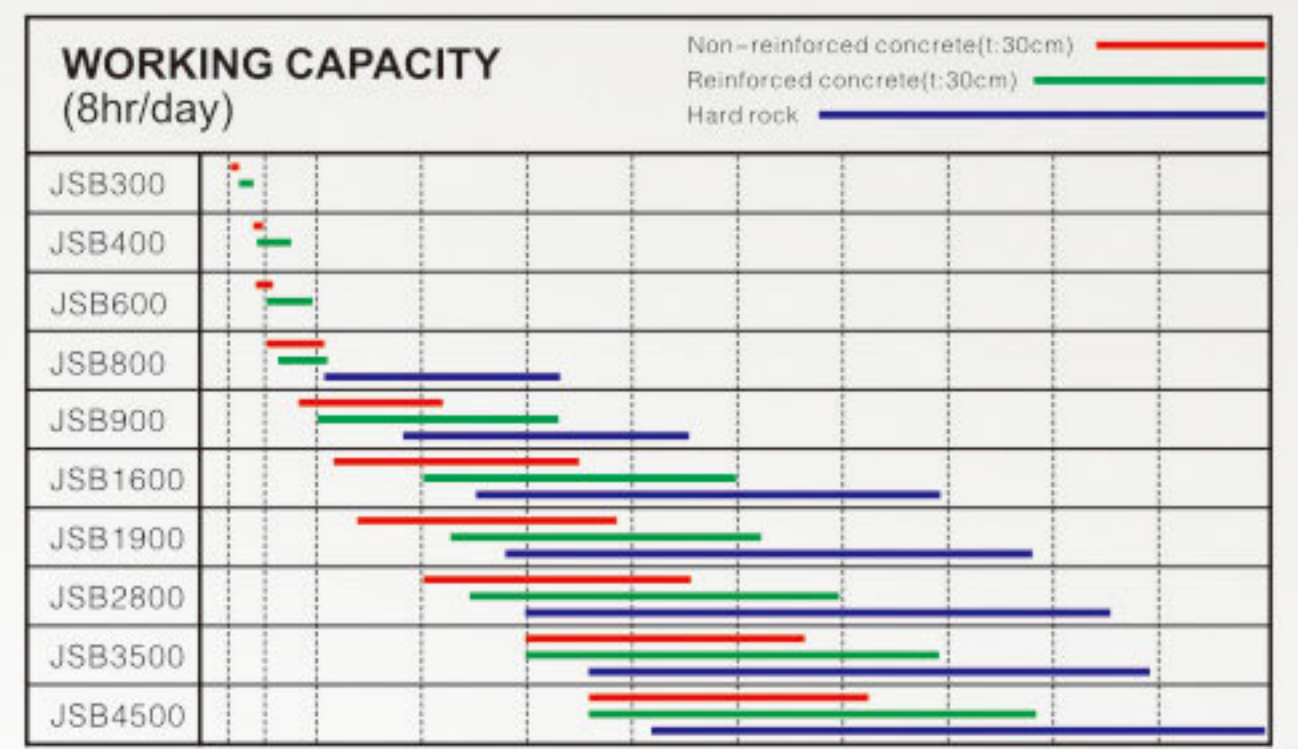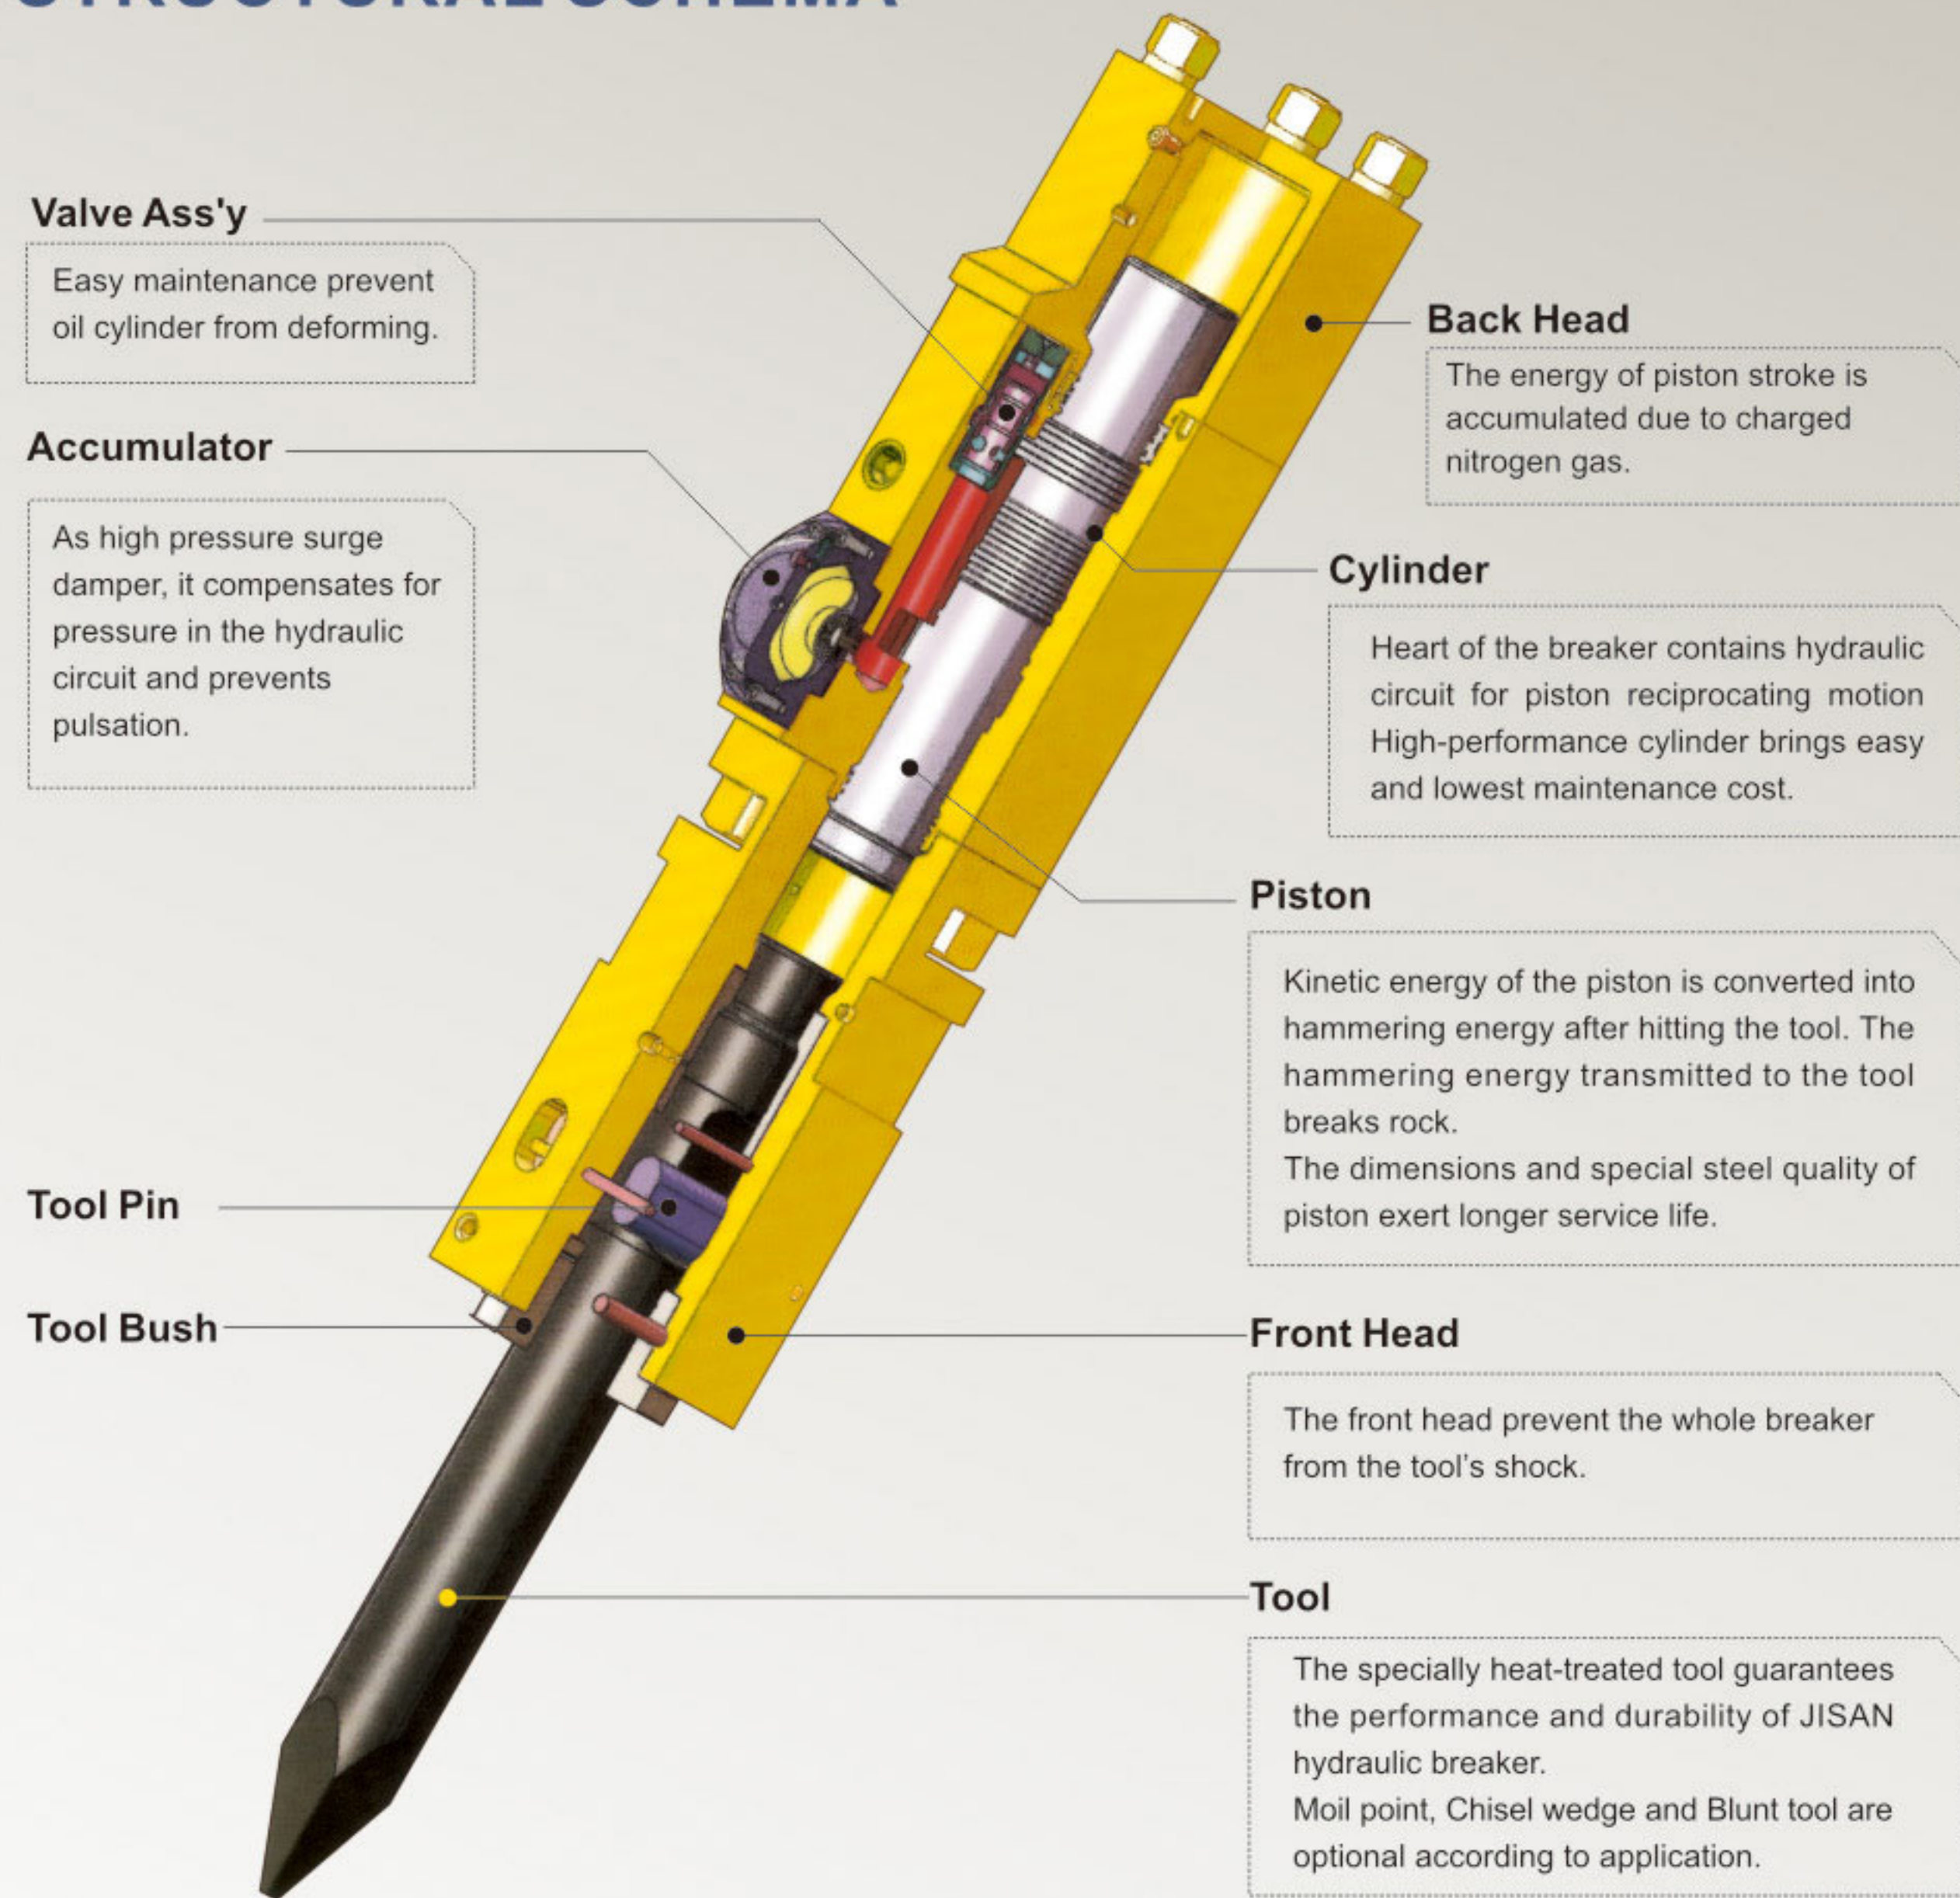

BOX TYPE HYDRAULIC BREAKER



Model Item	Unit	JSB200	JSB300	JSB400	JSB600	JSB800	JSB900	JSB1600	JSB1900	JSB2800	JSB3500	JSB4500	JSB5000	JSB5500	JSB6500
Weight	Kg	200	270	330	450	680	1000	2000	2050	2800	3100	3950	4200	4900	7100
Length	Mm	1344	1420	1590	1895	2101	2401	2822	2828	3052	3254	3450	3709	3800	4430
Pressure	Kg/cm ²	80-110	90-120	110-140	120-150	130-160	150-170	160-180	160-180	160-180	160-180	160-180	160-180	160-180	190-210
Flow	L/min	20-30	25-50	40-70	50-90	60-100	80-110	100-150	120-180	150-210	180-240	200-260	210-290	250-310	290-370
Rate	Bpm	600-1200	550-1000	500-900	400-800	400-800	350-700	350-600	350-500	300-450	300-450	250-400	200-350	250-320	200-400
Hose	Inch	1/2	1/2	1/2	1/2	3/4	3/4	1	1	1	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4
Chisel	Mm	45	53	68/70	75	85	100	135	140	150	155	165	175	180	210
Suit	Ton	0.8-3.0	1.0-3.5	4-7	6-9	7-14	11-16	16-21	18-26	25-30	28-45	30-45	40-55	44-70	65-100

TOP TYPE HYDRAULIC BREAKER



Top type breaker is applied to special operation that in larger elevation angle at municipal project dismantling.



SIDE TYPE HYDRAULIC BREAKER



JTB400
JSB200S
JSB300S
JSB400S
JSB600S



JTB900
JSB800S
JSB900S



JTB1600
JSB1600S
JSB1900S
JSB2800S
JSB3500S
JSB4500S
JSB5000S
JSB5500S
JSB6500S

Side type breaker is widely applied to mining and quarrying



Model Item	Unit	JSB200T	JSB300T	JSB400T	JSB600T	JSB800T	JSB900T	JSB1600T	JSB1900T	JSB2800T	JSB3500T	JSB4500T	JSB5000T	JSB5500T	JSB6500T
Weight	Kg	80	165	254	264	486	853	1679	1898	2455	3050	3920	4000	4600	7060
Length	Mm	1100	1190	1347	1528	1920	2260	2695	2810	2895	3152	3310	3400	3726	4430
Pressure	Kg/cm ²	90-120	90-120	110-140	110-160	120-170	150-170	160-180	160-180	160-180	160-180	160-180	160-180	180-200	190-210
Flow	L/min	15-25	25-50	25-45	30-45	45-85	80-120	120-160	130-170	150-190	170-220	200-300	210-290	250-310	290-370
Rate	Bpm	700-1200	600-1100	500-900	500-800	400-700	400-700	400-700	400-600	350-500	250-400	250-350	200-350	250-450	200-400
Hose	Inch	1/2	1/2	1/2	1/2	3/4	3/4	1	1	1	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4
Chisel	Mm	45	53	68/70	75	85	100	135	140	150	155	165	175	180	210
Suit	Ton	1.2-3.0	2.0-4.0	3.0-5.5	4.0-7.0	7.0-14	11-16	19-26	19-26	27-38	28-40	36-45	40-55	45-55	55-120

Model Item	Unit	JSB200S	JSB300S	JSB400S	JSB600S	JSB800S	JSB900S	JSB1600S	JSB1900S	JSB2800S	JSB3500S	JSB4500S	JSB5000S	JSB5500S	JSB6500S
Weight	Kg	80	165	254	264	486	853	1679	1898	2455	2650	3753	3910	4500	7060
Length	Mm	1100	1190	1347	1528	1920	2260	2695	2810	2895	3152	3310	3400	3726	4430
Pressure	Kg/cm ²	90-120	90-120	110-140	110-160	120-170	150-170	160-180	160-180	160-180	160-180	160-180	160-180	180-200	190-210
Flow	L/min	15-25	25-50	25-45	30-45	45-85	80-120	120-160	130-170	150-190	170-220	200-300	210-290	250-310	290-370
Rate	Bpm	700-1200	600-1100	500-900	500-800	400-700	400-700	400-700	400-600	350-500	250-400	250-350	200-350	250-450	200-400
Hose	Inch	1/2	1/2	1/2	1/2	3/4	3/4	1	1	1	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4
Chisel	Mm	45	53	68/70	75	85	100	135	140	150	155	165	175	180	210
Suit	Ton	1.2-3.0	2.0-4.0	3.0-5.5	4.0-7.0	7.0-14	11-16	19-26	19-26	27-38	28-40	36-45	40-55	45-55	55-120